

HyperDrop PAS™ GEL 4-Port with OptiTap® Lid

Waterproof Splicing and Patching Fiber Enclosure



Build Your Own MST

The LYNN HyperDrop PAS™ GEL with OptiTap lid streamlines fiber splicing, extending, repairing, and splitting, now with a hardened OptiTap lid to speed installs and simplify drop connections. Its all-plastic, IP68-rated housing protects connections in tough environments, while the gel-based sealing system delivers reliable waterproof performance for both round and flat drop cables.

- **Faster Drop Connections:** The OptiTap lid allows simple, direct plug-in of hardened drops, removing field splicing, which speeds up install time.
- **Midspan-Compatible:** All ports support midspan connections.
- **Build Your Own MST:** Modular OptiTap lids allow flexible port configurations for custom, plug-and-play deployment.
- **High-Capacity Distribution:** Features 2 inputs, up to 4 OptiTap outputs, and up to 8 pre-connectorized drops using round drop with LC connectors.
- **Accessible Splice Tray:** Features a clear covered splice tray for efficient fiber management.
- **Optimized for Passive Optical Network (PON):** Easily supports 8 flat drops or 12 round drops.
- **Flexible Signal Distribution:** Accommodates 1 pre-connectorized splitter, providing versatility in distributing across multiple fibers.
- **Versatile Deployment Options:** Can be pole-mounted, wall-mounted, installed aerially, or directly buried, making upgrades in any environment easier.


SKU	Description
HDPAS-GELH-4-04P04	HyperDrop PAS™ GEL 4 with SC/APC H connectors that are compatible with OptiTaps, IP68, 2 input/1 midspan, can hold 24 individual splice sleeves, OptiTap side includes 4 OptiTaps with 4 simplex 1M pigtailed preinstalled & adapter side not populated

**Ask us about additional custom order options.*

***OptiTap® is a registered trademark of Corning Incorporated. LYNN products are OptiTap® compatible.*

HyperDrop PAS™ GEL 4-Port with OptiTap® Lid

Waterproof Splicing and Patching Fiber Enclosure

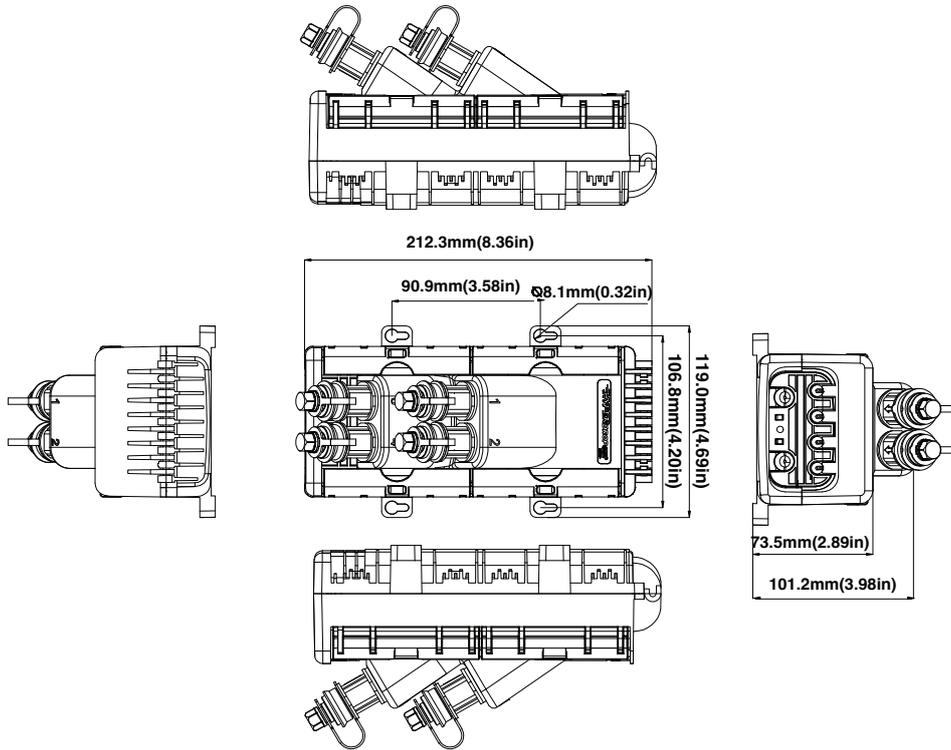

Technical Specifications

Weight:	0.65Kg
Adapter Capacity:	4 fiber with SC adapter or 8 fiber with LC adapter
Dimensions:	215 x 120 x 100 mm (8.46 x 4.72 x 3.94 in)
PLC Splitter Capacity:	Suitable for 1pc 1X2, 1X4, or 1X8 PLC splitter
Raw Material:	PP+GF for outer case; ABS for tray inside
Temperature Range:	-40°C to 80°C (-40°F to 176°F)
Environmental Rating:	IP68
Relative Humidity:	≤ 85%
Color:	Black
Atmospheric Pressure:	70 kPa to 106 kPa
Input Ports:	2 ea, 12 mm maximum diameter
Insulation Resistance:	≥2×10 ⁴ MΩ/500V(DC)
Output Ports:	4 ea, 8 mm maximum diameter
Voltage Strength:	≥3000V(DC)/min, no breakdown or flying arc
Additional Entry Ports:	4 SC/APC H connectors that are compatible with OptiTaps on lid
Compliance:	RoHS
Splice Capacity:	24 fiber with single fiber
Country of Origin:	China

Accessories

HDPAS-GEL-POLE-04	HyperDrop PAS™ GEL 4 Pole/PED mounting kit
HDPAS-GEL-AERIAL-04	HyperDrop PAS™ GEL 4 Aerial mounting kit