

HyperDrop PAS GEL 4-Port


Waterproof Splicing & Patching Fiber Enclosure



FEATURES

- **High-Capacity Distribution:** Features 2 inputs and 4 outputs.
- **Optimized for Passive Optical Network (PON):** Easily supports 4 flat drops or 8 round drops.
- **Accessible Splice Tray:** Includes easy-to-see fiber splicing tray.
- **IP68-Rated:** Protects against dust, moisture, and harsh conditions.

The LYNN HyperDrop PAS GEL streamlines the splicing, extending, repairing and splitting of fiber optic cables. Its all-plastic, IP68-rated design ensures connections are protected in a variety of environments over a long service life, and its unique gel-based sealing system ensures waterproof performance for both round and flat drop cable construction. The HyperDrop PAS GEL can be pole-mounted, wall-mounted, installed aerially or directly buried.

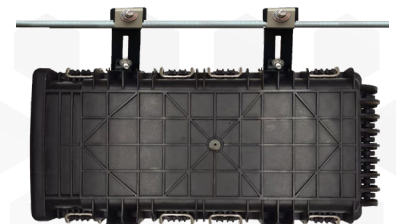


Aerial Installation




HDPAS-GEL-E-4
Drop Cable
Installation

Includes built-in
splice tray for 24
splice sleeves

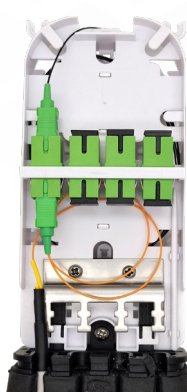

HDPAS-GEL-SA1-P4
SC Adapters with
Pigtail Installation

Includes built-in splice
tray for 24 splice
sleeves, 4 simplex
SC/APC adapters, 1M
pigtails preinstalled

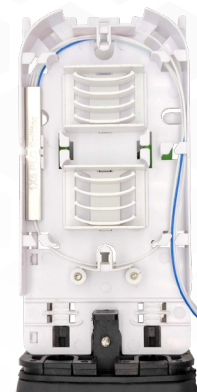

HDPAS-GEL-SA1-S4
PLC Module
Installation

Includes built-in splice
tray for 24 splice
sleeves, 4 simplex
SC/APC adapters,
1x4 splitter




ThinkLynn.com • (888) 235-2097

©2024 NSI Industries

LYNN_HyperDropGel_SpecSheet.pdf 250430

TECHNICAL SPECIFICATIONS

HyperDrop PAS GEL 4-Port

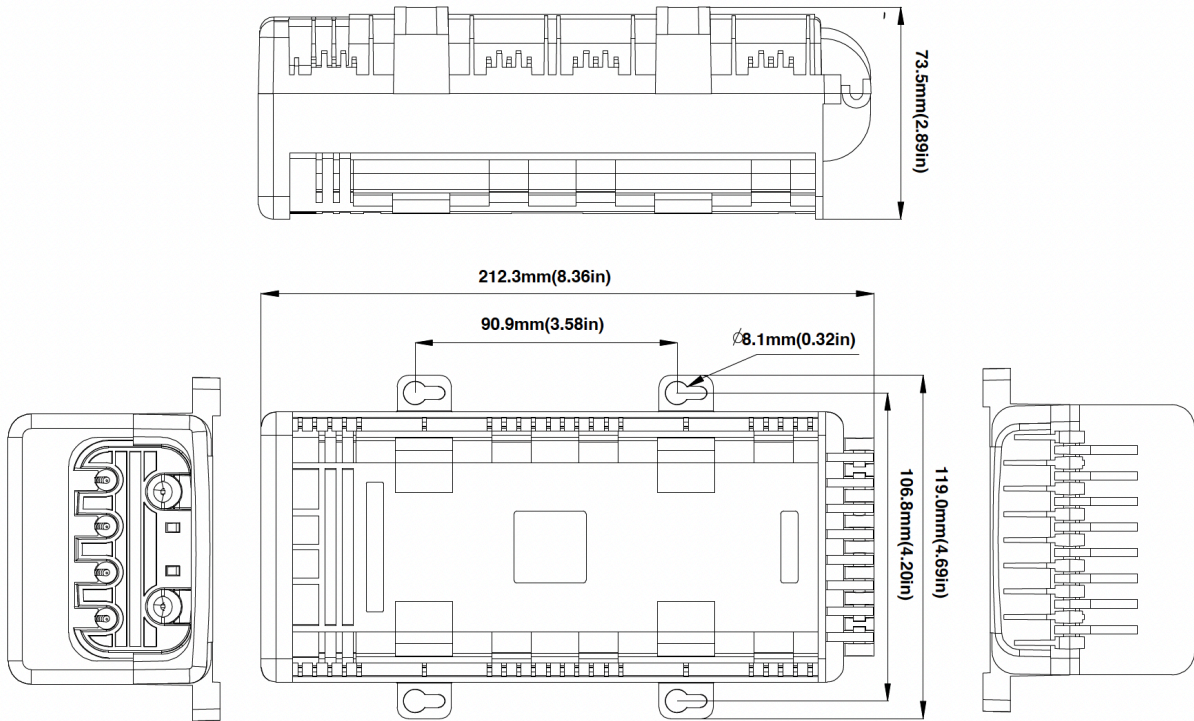

TECHNICAL SPECIFICATIONS	
Weight: 0.55 kg (1.2 lbs)	Temperature range: -40°C to 80°C (-40°F to 176°F)
Dimensions: 215 x 120 x 70 mm (8.46 x 4.72 x 2.76 in)	Relative humidity: ≤ 85%
Material: Glass fiber reinforced polypropylene	Environmental rating: IP68
Color: Black	Atmospheric pressure: 70 kPa to 106 kPa
Input ports: 2 ea, 12 mm maximum diameter	Insulation resistance: ≥2×10 ⁴ MΩ/500V(DC)
Output ports: 4 ea, 8 mm maximum diameter	Compliance: RoHS
Splice capacity: 24 fiber	Country of origin: China

INCLUDED ACCESSORIES	
Internal splice tray	Splice capacity: 24 fiber
Splice sleeves	Insulating foam
PTFE tubes	Cable ties
Wall mounting screws	SC/APC adapters (HDPAS-GEL-SA1-P4 and -S4 only)
Port plugs	1-meter pigtail (HDPAS-GEL-SA1-P4 only)
Output ports: 4 ea, 8 mm maximum diameter	1x4 PLC splitter (HDPAS-GEL-SA1-S4 only)

OPTIONAL ACCESSORIES	
HDPAS-GEL-POLE	HyperDropGEL pole mounting kit
HDPAS-GEL-AERIAL	HyperDropGEL aerial mounting kit

