

Simplex Rugged Fiber Pigtail - SC/APC

Simplex Fiber 250µm Pigtail, 9/125 Singlemode, 5 ft

The Simplex Rugged Fiber Pigtail is a 5-foot long, 2mm diameter, simplex singlemode 9/125/900µm tight-buffered optical fiber. The SC connector with APC polished end is pre-installed on one end with 18 inches of blue buffer fiber on the other. The end of the pigtail is ready to be stripped and fused or mechanically spliced to a single fiber of a multi-fiber trunk in half the time of traditional pigtail designs. The LSZH jacket is suitable for indoor and outdoor installations.



Features:

- 5-feet long, 2mm diameter LSZH jacket
- SC/APC connectors with 900µm buffered 18-inch blunt breakout heat-shrunk to cable jacket
- Faster installation than standard fiber pigtails: the outer jacket has already been stripped

MODELS	
S-SA1BLA9-CL12-005F	Simplex Pigtail, SC/APC Simplex – Blunt with 18” breakout in 900um blue, Choice, Singlemode, Corning® SMF-28e Ultra glass, G657A1 BIF, LSZH, Black Indoor/Outdoor, 2MM, 005 Feet


CABLE CONSTRUCTION	
FIBER COUNT	1
FIBER TYPE	Singlemode 9/125/900µm, Simplex
GLASS	Corning® SMF-28e Ultra
CONNECTOR TYPE	SC
POLISH TYPE	APC
JACKET RATING	Indoor/Outdoor LSZH
JACKET DIAMETER	2mm
JACKET COLOR	Black



Simplex Rugged Fiber Pigtail - SC/APC

CABLE PERFORMANCE	
INSERTION LOSS	≤0.2 dB
RETURN LOSS	≥60 dB
DURABILITY	>500 Matings

OTHER	
OPERATING TEMPERATURE RANGE	-20 °C to 70 °C (-4 °F to 158 °F)
COUNTRY OF ORIGIN	China
UPC	043404006421

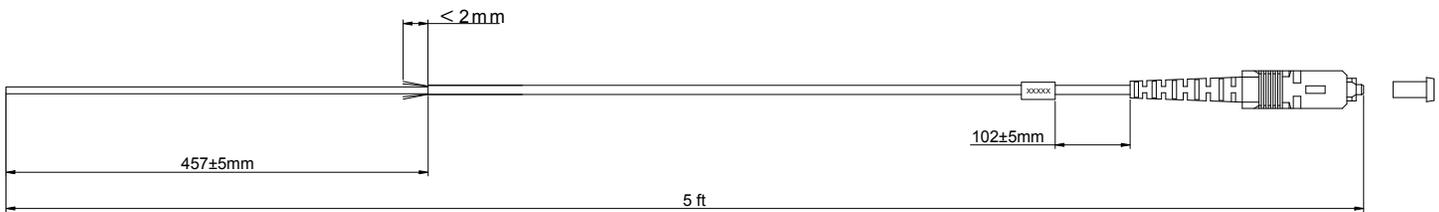

Notes:
 Insertion Loss ≤0.2dB
 Return Loss ≥ 60dB