


Rev.	Description	By	Date

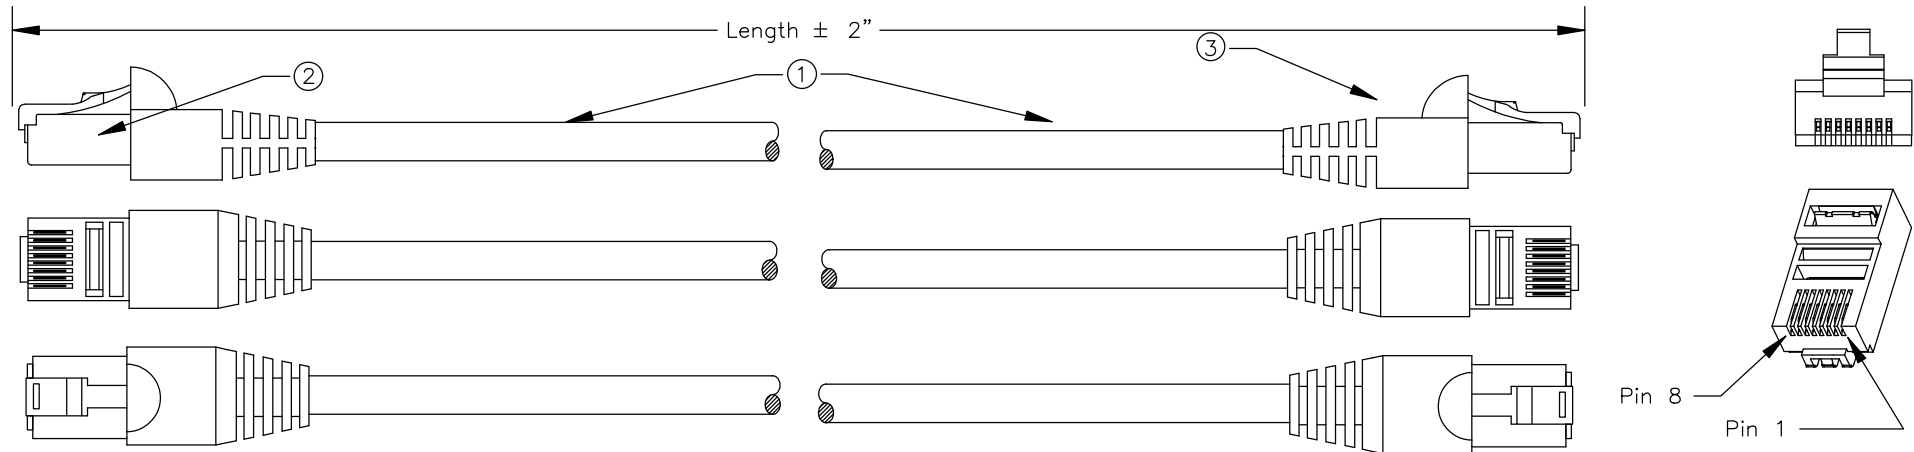


Applications

- Gigabit Ethernet 1000 Base-T
- Fast Ethernet 100 Base-T
- Ethernet 10 Base-T
- 4/16 Mbps Token Ring 802.5
- 100 VG-Any Lan
- 100 Mbps; 55-155-622 Mbps ATM
- Voice
- Broadband video
- Applications developed for operation over CAT5E or class D cabling

Standards compliance and Listings

- UL Listed
- ANSI/TIA/EIA-568-A
- ANSI/TIA/EIA-568-A-1
- ANSI/TIA/EIA-568-A-2
- ANSI/TIA/EIA-568-A-3
- ANSI/TIA/EIA-568-A-4
- ANSI/TIA/EIA-568-A-5
- ANSI/TIA/EIA-568-B-1, CAT5E
- ANSI/TIA/EIA-568-B-2, CAT5E
- ATSM D 4566-98
- ISO/IEC 11801
- Proposed ISO/IEC 11801 2nd edition, Class D & CAT5E

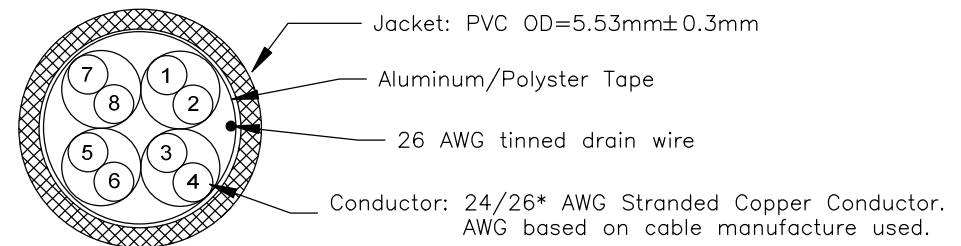

Wire Map

P1	Color	P2
1	White/Orange	1
2	Orange	2
3	White/Green	3
4	Blue	4
5	White/Blue	5
6	Green	6
7	White/Brown	7
8	Brown	8
S	Drain	S

Part Number Matrix

ECAT5SH-(LL)-BKB
Replace (LL) with length



Item	Description	Qty
1	Cable: CAT5E FTP Stranded Patch Cord	AR
2	Connector: High Performance CAT5E RJ45 Long Body Plug, Shielded	2
3	Strain Relief: Slide On Black Bubble Boot	2



Drawing No: ECAT5SH-XX-BKB

Drawn By: J.Riling

Desc:

CAT5E RJ45/45 Shielded Patch Cord, 568B, With Boots

Sheet: 1/1

Unit: FT

Drawing Date: 02/28/2012

Checked By: D.Phillips

Uncontrolled Copy

Scale: N/A

