

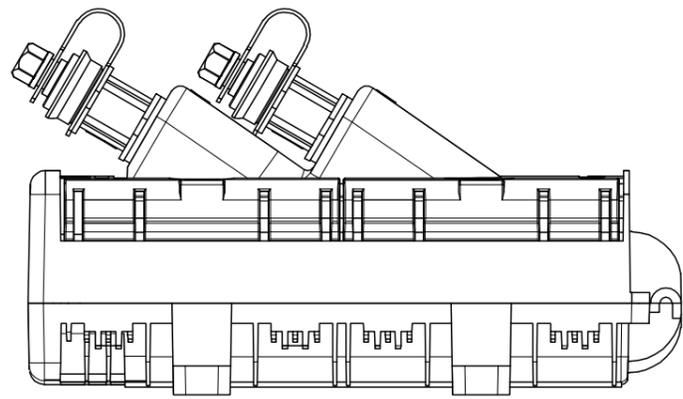
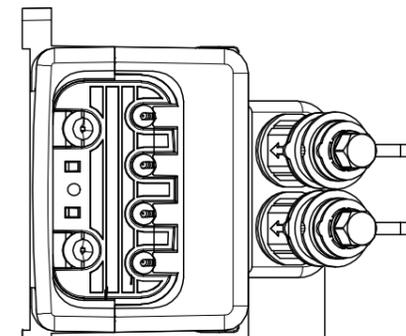


1 2 3 4 5 6 7 8

A  
B  
C  
D  
E  
F

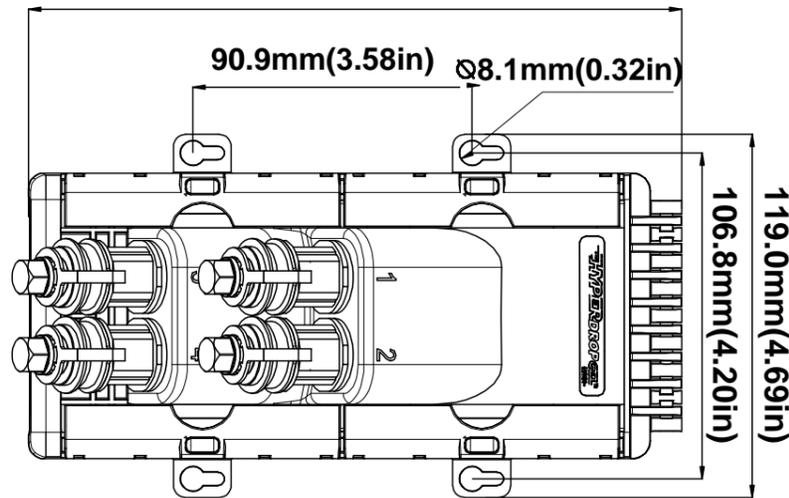


212.3mm(8.36in)

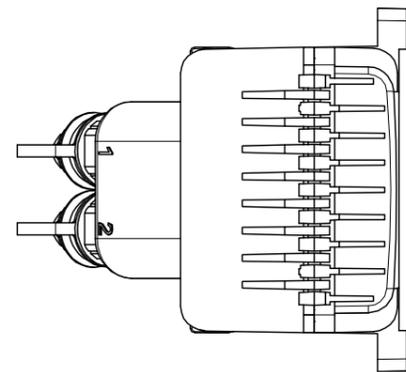

73.5mm(2.89in)

101.2mm(3.98in)

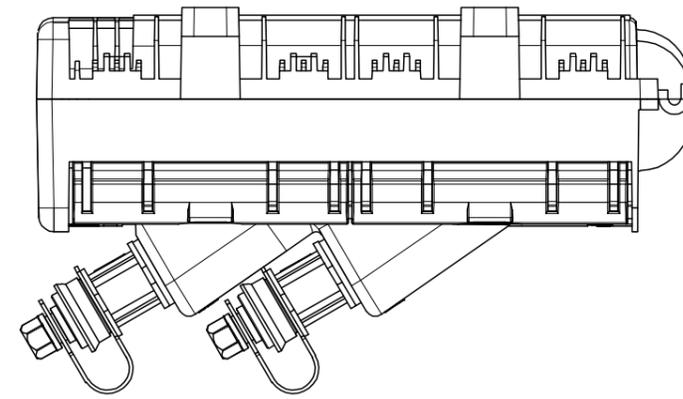

Product Features:

Item #	Item	Performance
1	IP Grade	IP68
2	Cable Sealing Method	Compressed gel
3	Closure Sealing Method	Hinged with latch
4	Connection Capacity	4-fiber with SC connector, 8-fiber with LC connector
5	Splice Capacity	24 fibers
6	Mounting Method	Wall, Pole, Aerial or Ped with kits

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
DRAWN: Nick Chen		DATE: 2025/11/20		 TITLE: HyperDrop PAS GEL 4™ with SC/APC H connectors that are compatible with Optitaps, IP68, 2 input/1 midspan, 4 simplex 1M pigtails preinstalled into Optitaps.	
CHK'D: Simon Wu		DATE: 2025/11/20			
APPV'D: Xiao Yao		DATE: 2025/11/20			
MATERIAL: PP+GF for outer case ABS for inside parts Stainless Steel for metal parts			DWG NO.	HDPAS-GELH-4-04P04	A3
WEIGHT: 0.65KG			SCALE:1:2	SHEET 1 OF 1	

1 2 3 4