
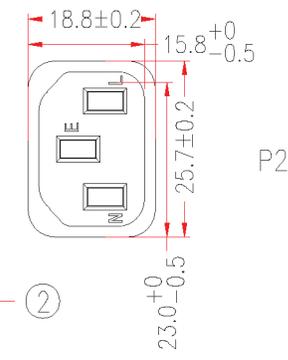
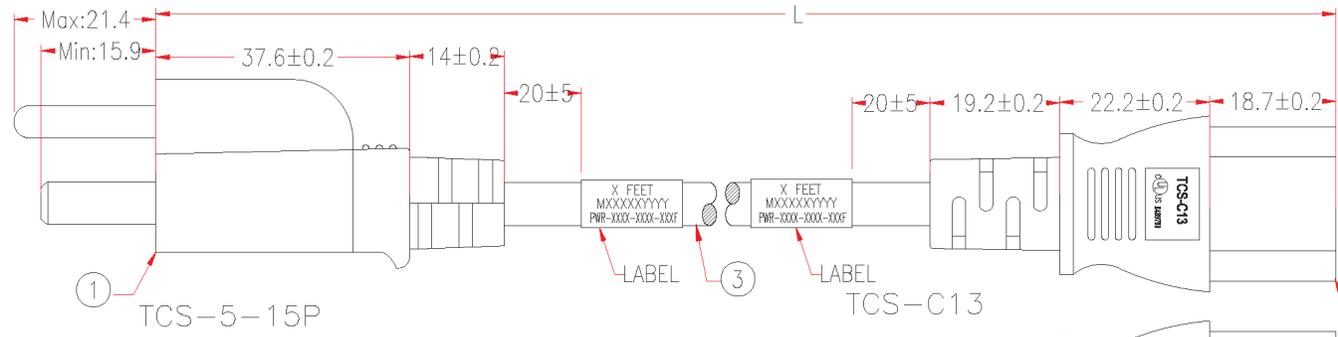


P1: M-058A


P2: M-059A

Customer No.: NO.1




PACKING: 10PCS IN A POLYBAG

PACKING A: <3FT PE



PACKING B: >=3FT PE



P/N	JACKET & MOLDED COLOR
PWR-3PVL-11BK	BLACK
PWR-3PVL-11BL	BLUE(PT286C)
PWR-3PVL-11GN	GREEN(PT376C)
PWR-3PVL-11GR	GRAY(PANTONE421C)
PWR-3PVL-11OR	ORANGE(PANTONE1565C)
PWR-3PVL-11YE	YELLOW(PANTONE123C)
PWR-3PVL-11RD	RED(PT201C)

CABLE MARKING:

(UL) SVT 3/C 18AWG(0.824MM<sup>2</sup>) VW-1 105°C 300V E495164  
 C (UL) SVT 3/C 0.824MM<sup>2</sup>(18AWG) FT2 105°C 300V E495164 TCS

	P1	P2
BLACK	L	L
WHITE	N	N
GREEN	E	E

Part Number: X FEET MXXXXXXYY PWR-XXXX-XXXX-XXXF  
 X is length Unique serial number  
 label

\*NOTE: All relevant materials are complied with RoHS directive .  
 The label is waterproof  
 THE MARKING IS CONCAVE LETTERING MOULD

P1: TCS-5-15P cULus E489799  
 P2: TCS-C13 cULus 348799

No.	DESCRIPTION	Q'TY	Supplier
3	UL SVT 18AWG x 3C, OD 6.3mm, SVT Jacket	L-30mm	M304
2	MOLDED PVC 35P, BLACK		M304
	BRACKET: CP-R445A-BS	1	M767
	TERMINAL: 2*4mm 98744BS-0/A	3	M257
1	MOLDED PVC 35P, BLACK		M304
	BRACKET: YS-002 BLACK	1	M767
	TERMINAL: 98661BS-1	2	M257
	TERMINAL: ø4.75 98475BS-1	1	M257

APPROVED			<b>LYNN</b>		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU	27/SEP/17	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	ZHU	27/SEP/17	PRODUCT NO.	PWR-3PVL-11xx-xxxF	

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

UNIT: mm