



P1: M-059A

P2: M-063A

Customer No.: NO.1

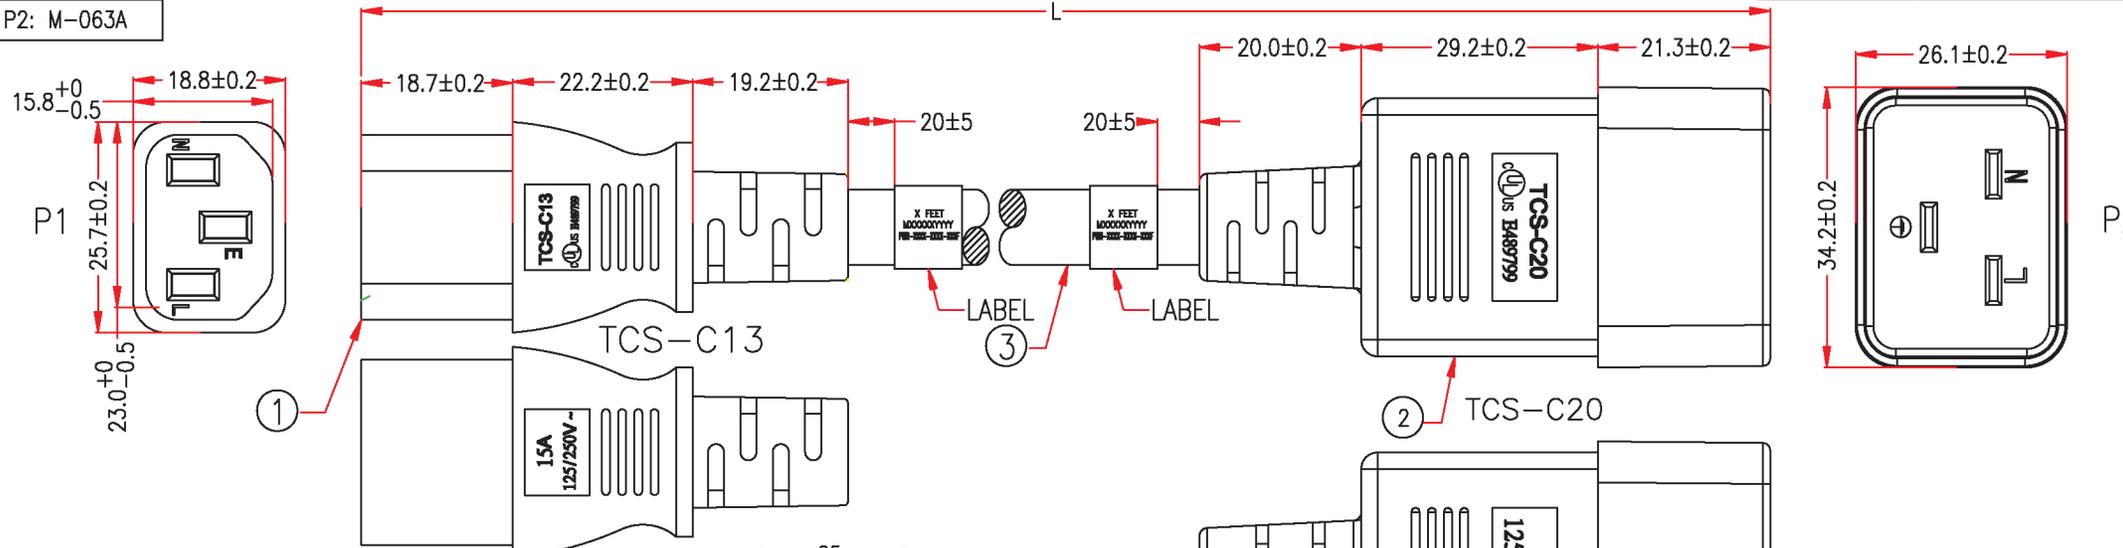

P/N	JACKET & MOLDED & BRACKET COLOR
PWR-30JL-52BK	BLACK
PWR-30JL-52RD	RED(PT201C)
PWR-30JL-52GN	GREEN(PT376C)
PWR-30JL-52BL	BLUE(PT286C)
PWR-30JL-52GR	GRAY(PANTONE421C)
PWR-30JL-52OR	ORANGE(PANTONE1565C)
PWR-30JL-52YE	YELLOW(PANTONE123C)


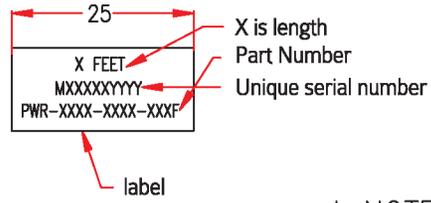


P1: TCS-C13 cULus E489799  
 P2: TCS-C20 cULus E489799

\* NOTE: All relevant materials are complied with RoHS directive .  
 The label is waterproof  
 THE MARKING IS CONCAVE LETTERING MOULD

PACKING: 10PCS IN A POLYBAG  
 PACKING A: <3FT  
 PE

PACKING B: >=3FT  
 PE



MARKING:

(UL) SJT 3/C 14AWG(2.08MM<sup>2</sup>) VW-1 105°C 300V E495164  
 C (UL) SJT 3/C 2.08MM<sup>2</sup>(14AWG) FT2 105°C 300V E495164 TCS

	P1	P2
BLACK	L _____ L	L _____ L
WHITE	N _____ N	N _____ N
GREEN	E _____ E	E _____ E

No.	DESCRIPTION	Q'TY	Supplier
3	UL SJT 14AWG x 3C, OD 9.3mm, SJT Jacket	H5TC47-0304K09	L-30mm M304
2	MOLDED PVC 35P, BLACK	H1BC02-0304K09	M304
	BRACKET: YST-038 BLACK	A1QC37-0767K09	1 M767
	TERMINAL: 97607BS-1	A1QB35-0257	1 M257
	TERMINAL: 97606BS-1	A1QB34-0257	2 M257
1	MOLDED PVC 35P, BLACK	H1BC02-0304K09	M304
	BRACKET: YS-003	A1QC14-0767	1 M767
	TERMINAL: 2*4mm,98744L	A1QB42-0257	3 M257

APPROVED	CHECKED	DRAWING	DESCRIPTION	UNIT
	HU	ZHU	POWER SUPPLY CORDS & CORDS SETS	mm
			PWR-30JL-52xx-xxxF	



Cable Length Unless Other Spec.  
 Tolerances:  
 0 ~200mm ±10mm  
 201~1000mm ±20mm  
 1001~1500mm ±25mm  
 1501~2100mm ±30mm  
 2100mm± ±40mm

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm