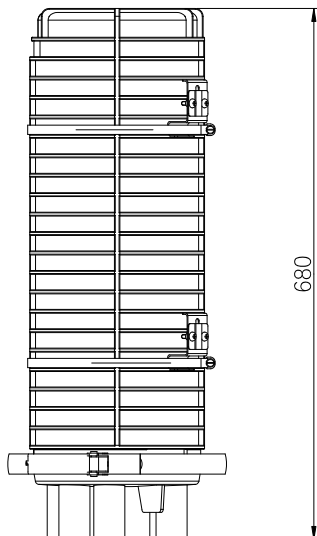
















NOTE:
1.Material: Dome And Base:Modified PP;
Clamp:Nylon +GF;
Tray:ABS;
Metal parts:Stainless steel;
2.Entry Ports Number:1 Oval Port,5 Round Ports;
3.Sealing Method:Heat-shrink;
4.IP Grade:IP68;
5.Capacity:576F.

REV	ECN NO.	CHANGE CONTENT	SIGNATURE	DATE
A1		First Issued		

	SIGNATURE	DATE	LYNN			
DRAWN	蕭鸡礲	2022/10/20	MAT'L		PRODUCT NO.	HDCAN-576
CHK'D	瑩鉈鰐	2022/10/20	UNITS	mm	PRODUCT NAME	HyperDropCAN™, IP68 grade, 576 fiber max
PROCESS		2022/10/20	SCALE		DRAWING NO.	HDCAN-576
APPV'D	瑩鉈鰐	2022/10/20	TYPE OF PROJECTION		SHEET 1 OF 1	
					REV	A1

Accessory packs:

Name	Qty	Picture	Name			Qty	Picture
Velcro strip with one X flake	1pc						
Nylon tie & Transparent PE tube	4 bag		Items	Nylon tie	8		
				Transparent PE tube	8		
Round Port accessories bag	1 bag		Items	Heat-shrink tube	5		
				Abrasive tape	1		
				Aluminium foil	5		
Oval port accessories bag	1bag		Items	Heat-shrink tube	1		
				Abrasive tape	1		
				Aluminium foil	2		
				Cleaning tissue	1		
				Desiccant	1		
				Shield continuity wire	6		
				AMP clamp	1		
				Branch off clip	1	