

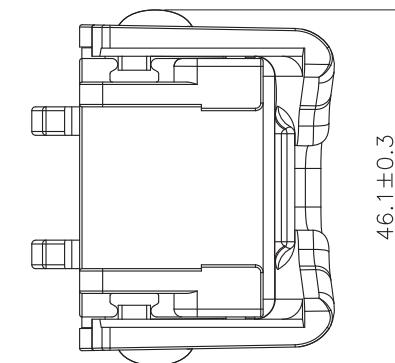
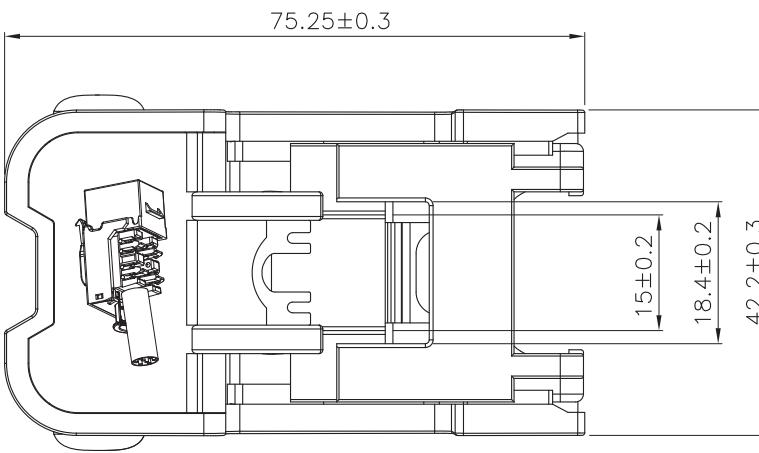


A

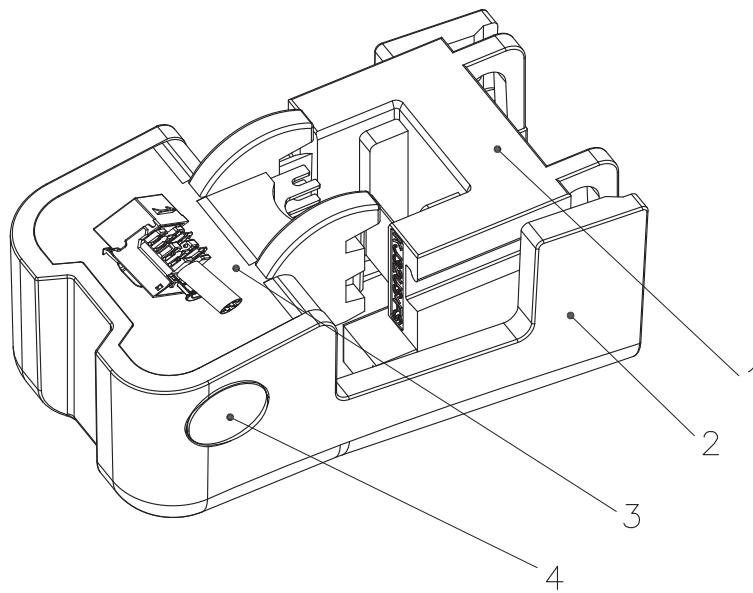

B

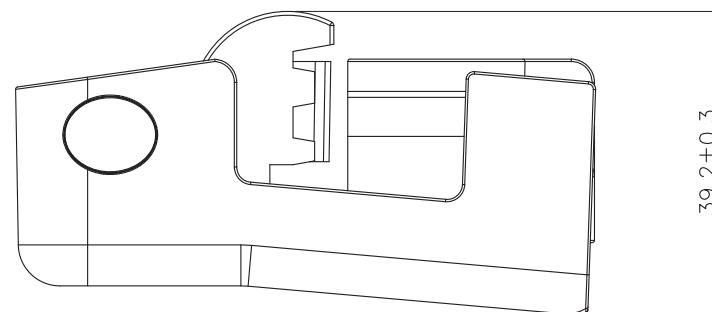

### Specification :

#### Material :

- 1. Slide Carriage : Polycarbonate, UL 94V-2 Black.
- 2. Housing : ABS+PC, UL 94V-2 Black.
- 3. Bracket Set :
  - 3-1. Polycarbonate, UL 94V-2 Black.
  - 3-2. MN 0.5mm thickness with 5~8um Nickel plated.
  - 3-3. SUS420.
- 4. Push Button : Polycarbonate, UL 94V-2 Black.

#### Performance :

- a. Operating Function :For Keystone Jack.
- b. Operating Temperature :  $-20^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$ .
- c. Storage Temperature :  $-20^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$ .

GENERAL TOLERANCE OF DIMENSIONS	DRAWING	03.MAR.2015	XIAOLU	ITEM NO.: PRO-KEY-DIE
	CHECK	03.MAR.2015	DAY	
	APPROVAL	03.MAR.2015	JAIMY	
	DATE	NAME		
	SCALE	1/2(A4)	mm	
	DRAWING NO.			
DRAWING CLASSIFICATION	DRAWING CLASSIFICATION	S	SHEET	1 OF 1
		A3		